

The geotechnical analysis corresponding to the high road embankments close to a bridge

L'analyse géotechnique correspondant aux remblais routiers de grande hauteur à proximité d'un pont

Chirica A.

Technical University of Civil Engineering, Faculty of railways, roads and bridges, Bucharest, 020396 Romania

Vintila D., Tenea D.

Ovidius University Constanta, Faculty of civil engineering, Constantza, 900524 Romania

ABSTRACT: The paper presents a complex study case corresponding to a road embankment until 10m height placed at Iassy, Romania. It is about the access embankments at a bridge with total length of about 300m. After one year of service the studied embankments presented the following geotechnical problems: longitudinal cracks parallel and along with road axis, lateral knobs corresponding to each compacted layer, infiltrations through the backfill from the top (faulty pluvial system) and from the bottom (flooded foundation soil without drainage system). Foundation soil is metastable clay. Triaxial tests type CKoD on stress loading paths has shown that this soil is sensitive to moistening at shear stresses. The embankment is made also from a clay unusually used for such type of structures and several geosynthetic layers. At the top there is an elastic pavement. The footwalks over the embankment are from reinforced concrete and are bracket assembled. The finite element model has taken into account various hypothesis: 1. Model with the soils in natural state, 2. Model with foundation soil in flooded state, 3. Model with foundation soil in flooded state and different artificial consolidation on embankment width.

RÉSUMÉ : Cet article présente une étude de cas complexe correspondant à un remblai routier de 10m de hauteur placé à Iassy, Roumanie. L'étude porte sur les remblais d'accès à un pont d'une longueur totale de 300 mètres. Après une année de service les remblais étudiés ont présenté les problèmes géotechniques suivants: fissures longitudinales parallèles et le long de l'axe de la route, bourrelets latéraux correspondant à chaque couche compactée, infiltrations à travers le remblai depuis le haut (système pluvial défectueux) et par le bas (sol de fondation inondé sans système de drainage). Le sol de fondation est constitué d'argile métastable. Des essais triaxiaux de type CK_oD en chemin de contraintes ont montré que ce sol est sensible à l'humidification lorsqu'il est soumis à des contraintes de cisaillement. Le remblai est également constitué d'une argile inhabituelle pour ce type de structures et est renforcé de plusieurs couches de matériaux géosynthétiques. Au sommet se trouve une couche de roulement souple. Les trottoirs en crête de remblai sont en béton armé et sont assemblés sur place. Le modèle aux éléments finis a pris en compte différentes hypothèses: 1. Modèle avec les sols à l'état naturel, 2. Modèle avec les sols de fondation inondés, 3. Modèle avec les sols de fondation à l'état inondé et différentes consolidations artificielles sur la largeur du remblai.

KEYWORDS: high road embankments, seismic loads, geotechnical investigations.

1 INTRODUCTION. FIRST LEVEL HEADING

The object of this paper is to present the analysis of a road embankment with variable height (between 4-10m) placed at Iassy, Romania (Fig. 1, 2, 3, 4). This embankment presents from the first year of service longitudinal cracks parallel with road axle, lateral knobs corresponding to each compacted layer, infiltrations through the backfill from the top and from the bottom. The owner employed an investigation team to identify, analyse and propose consolidation work for this embankment.

Investigation team lead by the first author paid a visit to establish the "to do" list. First of all we identify the problems named before. After this we have made an geotechnical study to identify correctly the soil parameters, dimensions of foundations and water level. Based on this parameters we were able to do an analysis of this embankments using Plaxis software. The analysis contains the following models: 1. Model with the soils in natural state, 2. Model with foundation soil in flooded state, 3. Model with foundation soil in flooded state and different artificial consolidation on embankment width.



Figure 1 General view of the embankment



Figure 2 Lateral view of the embankment.



Figure 3 Longitudinal view of the embankment.



Figure 4 Zone between embankment - bridge.

2 GEOTECHNICAL INVESTIGATIONS

Geotechnical studies show the followings:

- the lithology of soil is: vegetable soil 0,5m, black/yellow plastic clay for up to 5,00m (Bahlui clay), saturated sand, saturated sand with gravel (5-7m) and marl clay from 12m;
- underground water from 2-4m from terrain level, this level can be ascensional with 0,8m;
- peak ground acceleration $a_g=0,2g$, $T_c=1\text{sec}$ (P100-2006);
- Bahlui clay is very active, with high compressibility and big variations of volume (shrinkage-belly);
- plasticity index $I_p = (30\div 45)\%$;
- saturation degree $S_r = 0.80\div 0.90$;
- oedometric modulus $M_{2,3} = 4.000\div 10.000 \text{ kPa}$;
- modulus of linear deformation $E \approx 50.00\text{kPa}$;
- dry volumic weight $\gamma_d = 14.8\div 15.5\text{kN/m}^3$;
- natural volumic weight $\gamma = 18.75\div 19\text{kN/m}^3$;
- porosity $n = (40\div 45)\%$;
- void ratio $e = 0.838$;
- angle of internal friction $\phi = 12^\circ\div 16^\circ$;
- cohesion $c = (15\div 25)\text{kPa}$.

For construction supervision of soil works have been made the following tests: (a) tests in open system (CK_0D), for which the specimens during shearing until breaking have been in contact with water from the beginning, soil being free to change his humidity with the raising the intensity of shearing force, (b) tests in closed system (CK_0D-A), for which the specimens during shearing until breaking have been in natural state humidity without any contact with a free source of water.

For both type of tests the specimens are consolidated under stress states corresponding to "K₀ line", after which they are sheared as presented above.

We can observe that on both loading systems, in the zone of normal stresses $\sigma' < 0,8 \text{ daN/cm}^2$ intrinsic curve has big values for angle of internal friction and low values for cohesion and in the zone of normal stresses $\sigma' > 0,8 \text{ daN/cm}^2$ situation is reversed. Also it can be seen that for closed system of testing intrinsic curve near the origin of axis Bahlui clay has values 4 times bigger for apparent cohesion c' , and in the zone of normal stresses $\sigma' > 0,8 \text{ daN/cm}^2$ presents values a little bigger for apparent angle of internal friction ϕ' .

From tests we have seen that, invariable, the specific volume deformation of specimens tested in open system, correspond to

a reduction of void ratio through shearing and for specimens tested in closed system specific volume deformation correspond to a mechanical growing – dilatancy who appears in a specified point in load path function of lateral pressure σ_3 . Also it is important to note that dilatancy appears when deviatoric stresses q is in direct rapport with spherical stress p and volume variation depends of q . This experimental observation has a great practical importance because it shows the zones in wich dilatancy occurs function of the report between deviatoric stress and spherical stress.

In conclusion, material properties for analysis are:

1. Bahlui clay:

a. Dry state:

$$\gamma=17\text{kN/m}^3, \phi=23^\circ, c_d=20\text{kPa}, E=15.000\text{kPa}, \nu=0,30$$

b. Floded state:

$$\gamma=21\text{kN/m}^3, \phi=25^\circ, c_d=5\text{kPa}, E=5.000\text{kPa}, \nu=0,35$$

2. Backfill for embankment:

$$\gamma=20\text{kN/m}^3, \phi=20^\circ, c=50\text{kPa}, E=18.000\text{kPa}, \nu=0,30$$

3. Loose backfill:

$$\gamma=20\text{kN/m}^3, \phi=20^\circ, c=50\text{kPa}, E=10.000\text{kPa}, \nu=0,30$$

4. Stone layer:

$$\gamma=20\text{kN/m}^3, \phi=25^\circ, c=1\text{kPa}, E=30.000\text{kPa}, \nu=0,30$$

5. Asphalt:

$$\gamma=22\text{kN/m}^3, E=20.000\text{kPa}, \nu=0,20$$

Loads are:

- self weight,
- on road – 100kN/m^2 ,
- on sidewalk – 10kN/m^2 .

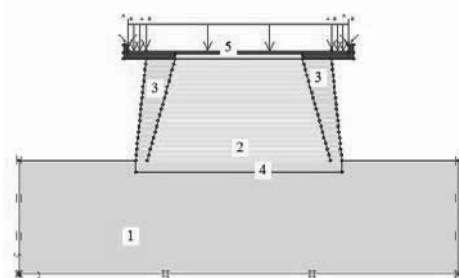


Figure 5 General section with materials.

3 FINITE ELEMENT ANALYSIS

The analysis was made using PLAXIS software. Model was plane strain with 15 node elements.

The analysis was made to predict future behavior of the embankment. Different models were taken into consideration taken into consideration the following:

- Foundation soil of embankment is almost every time of the year floded. Bahlui river is not flood controlled in that area.
- Backfill was loose on the edges of the embankment due to the lack of technology used in civil works (Fig. 4).

The 3 models taken into analysis are:

- a) MODEL 1. Model with soils in natural state
- b) MODEL 2. Model with foundation soil in floded state
- c) MODEL 3. Seismic response due to earthquake with foundation soil in floded state

a) MODEL 1. Model with soils in natural state.

This model is the simplest model taken into consideration. This means that the properties of materials are in natural state.

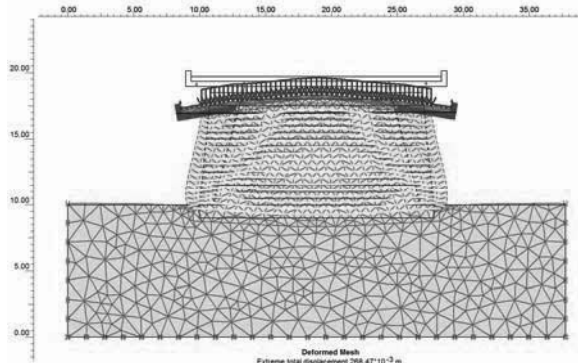


Figure 6 Deformed mesh.

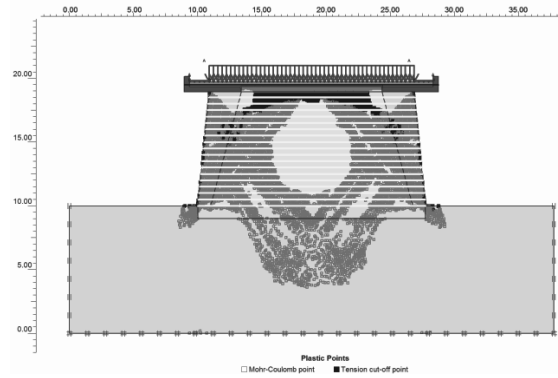


Figure 10 Plastic points.

a) MODEL 2. Model with foundation soil in flooded state. This 2nd model is taken into consideration the flooded state of materials.

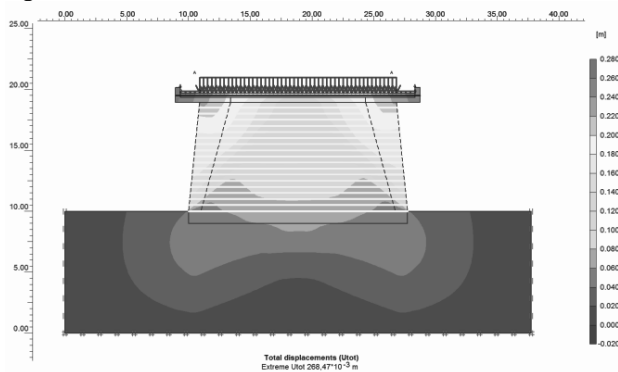


Figure 7 Total displacements.

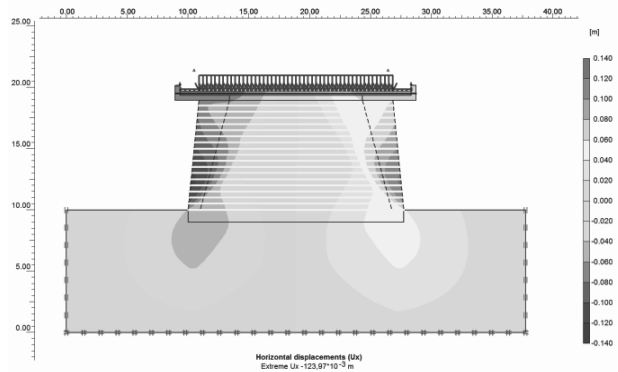


Figure 8 Horizontal displacements.

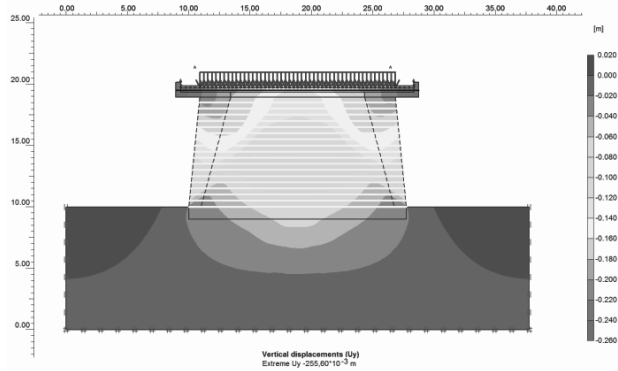


Figure 9 Vertical displacements.

The conclusion of this calculus is that the maximum total displacement is 280mm (at the edge the sidewalks - Fig. 9). As it can be seen in Fig. 10 the plastic points appear at the edges of the embankments and in the central part of soil foundation at a approx. depth of 5m. Also, a very important notice is that the plastic points also appear at the edge of the embankments at maximum 1m around the body of backfill.

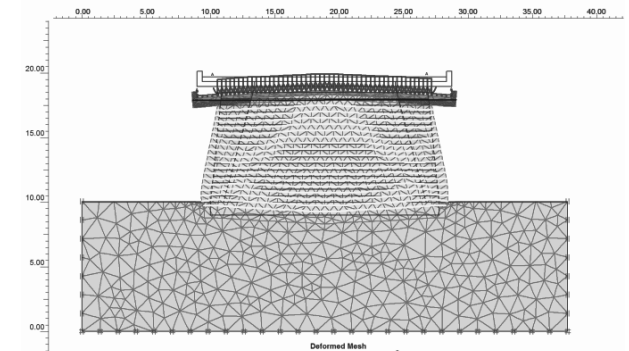


Figure 11 Deformed mesh.

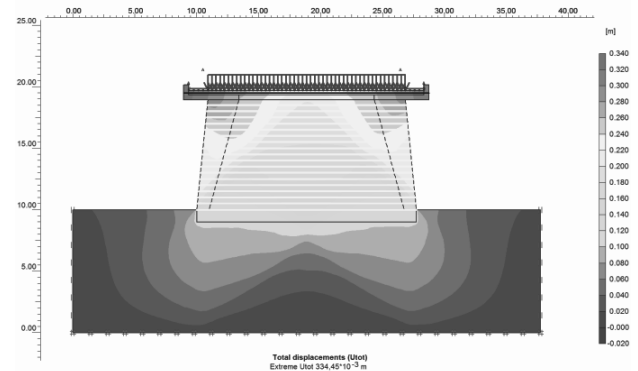


Figure 12 Total displacements.

The conclusion of this calculus is that the maximum total displacement is 33,5mm (at the edge the sidewalks - Fig. 12). As it can be seen in Fig. 15 the plastic points appear at the edges of the embankments and in the central part of soil foundation at a approx. depth of 10 m. Also, a very important notice is that the plastic points also appear at the edge of the embankments at around 5m around the body of backfill. From Stability analysis we can see that the structure is almost permanent at limit having a factor of safety 1,105. Fig. 17 show us that the embankment structure has a very small reserve in strength for seismic action.

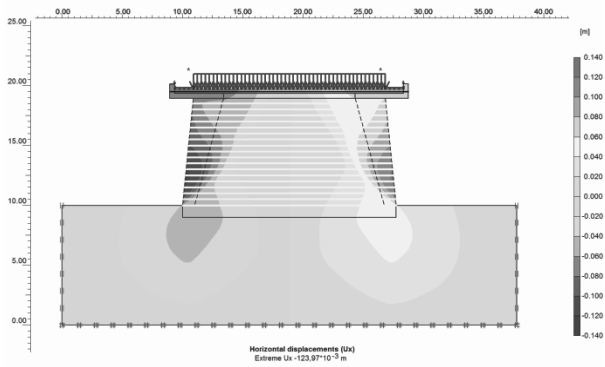


Figure 13 Horizontal displacements.

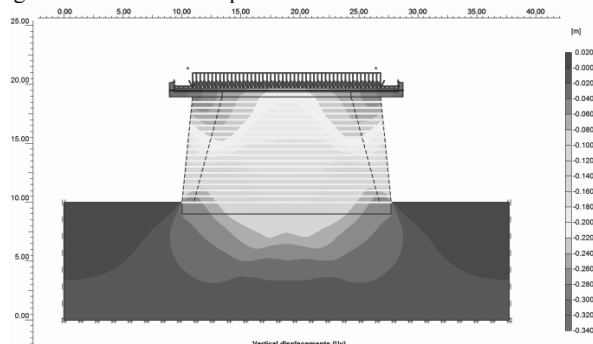


Figure 14 Vertical displacements.

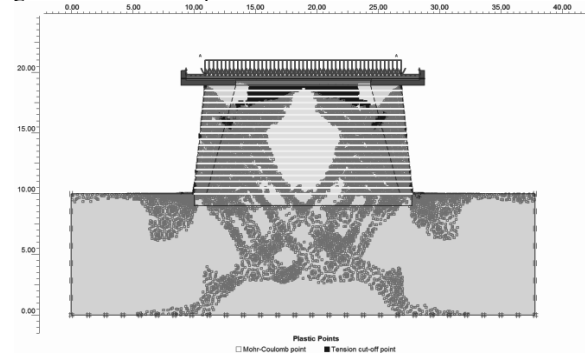


Figure 15 Plastic points.

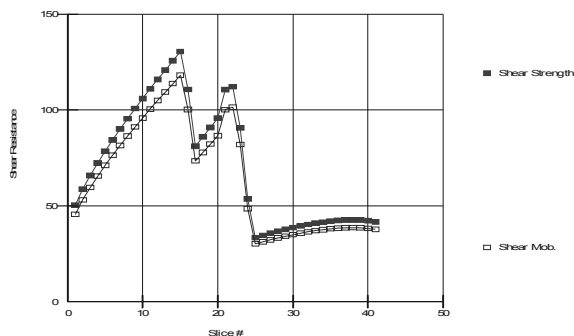


Figure 16 Shear resistance versus slice.

b) MODEL 3. Seismic response due to earthquake with foundation soil in flooded state.

For this model GEOSLOPE is used for analysis. Here a dynamic analysis was performed according to the romanian seismic code P100-2006. A scaled accelerogram was used with peak ground acceleration of 0,2g and 15s. Time increment was 0,02s and results were saved at every 10 steps.

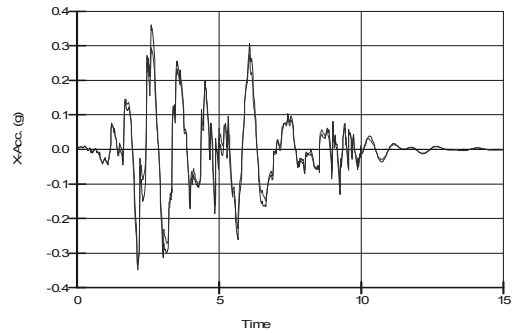


Figure 17 Time history (x-acceleration) - output.

The conclusion of this calculus is that the maximum horizontal acceleration at the top of the embankment is 0,35g. From stability analysis we can see that the structure is unstable having a factor of safety 0,995.

4 CONCLUSIONS

- Model 1: the maximum total displacement is 280mm (at the edge the sidewalks - Fig. 6). As it can be seen in Fig. 10 the plastic points appear at the edges of the embankments and in the central part of soil foundation at a approx. depth of 5m. Also, a very important notice is that the plastic points also appear at the edge of the embankment at maximum 1m around the body of backfill.
- Model 2: maximum total displacement is 33,5mm (at the edge the sidewalks - Fig. 11). As it can be seen in Fig. 15 the plastic points appear at the edges of the embankments and in the central part of soil foundation at a approx. depth of 10 m. Also, a very important notice is that the plastic points also appear at the edge of the embankments at around 5m around the body of backfill. From Stability analysis we can see that the structure is almost permanent at limit having a factor of safety 1,105. Fig. 16 show us that the embankment structure has a very small reserve in strength for seismic action.
- Model 3: the maximum horizontal acceleration at the top of the embankment is 0,35g. From stability analysis we can see that the structure is unstable having a factor of safety 0,995. Fig. 17 shows that the embankment structure has no reserve in strength.
- All tests and calculations made underline high strain and low bearing capacity of flooded state soil foundation.
- Soil foundation is high compressibility terrain with great sensibility at moistening under stresses according to specific macrostructure.
- To realize this works uncohesive soils are recommended; all tests on Bahlui clay show that this material is not proper to be used safely for embankments.

5 REFERENCES

Bowles, J. E. [1997] "Foundation analysis and design", Ed. McGraw-Hill international editions, Civil Engineering Series, Fifth Editions.

Chirica, A. [1995]. "Tasarea și cedarea pământurilor macrostructurate", Editura UTGB

Ieremia, M. [1998]. "Elasticitate, plasticitate, neliniaritate" Ed. Printech, Bucuresti.

Tenea, D. [2007]. "Contributii privind metodele de tratare si ranforsare a pamanturilor cu structura metastabila in cazul cailor de comunicatie", Ed. UTGB.